



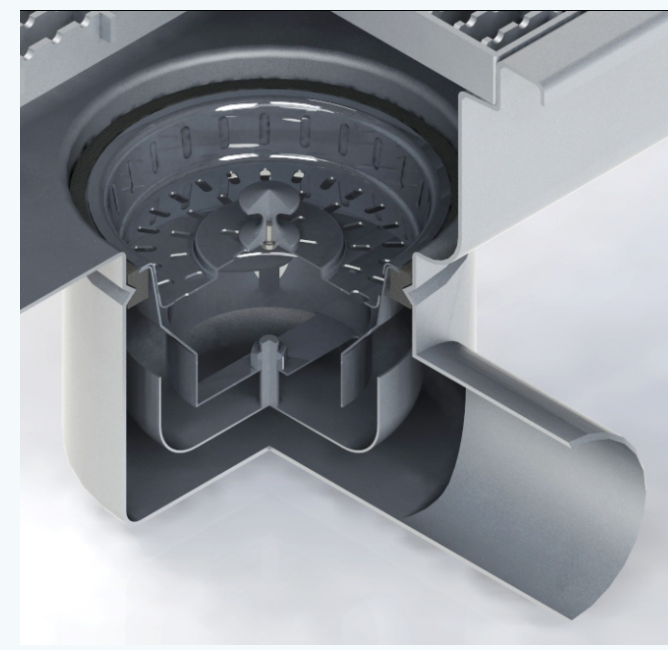

Kitchen Drainage and Grease Management

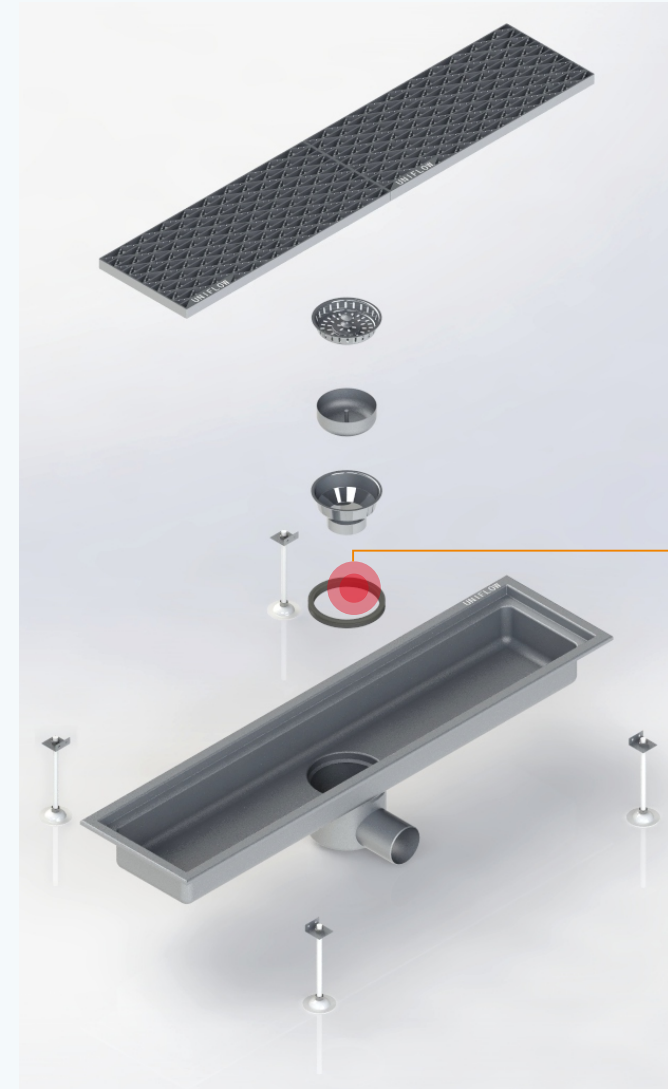

• **可拆式防滑柵格蓋板:**
排水槽內有橫坡和縱坡, 可拆式隔渣籃, 易於清潔且降低人工清潔成本。
Removable nonslip grating:
With parallel and crossed slope channel, removable waste basket make cleaning easy and lower labor cost.

• **易拆式雜質濾網兜:**
可方便地取出並對雜物進行清理, 避免管道堵塞, 易於清潔, 輕鬆保證廚房衛生環境。
Removable waste trap can be removed easily for clean up, avoid blockage to ensure kitchen hygiene.

• **密封膠圈與活動儲水兜可防止異味逸出**
Rubber seal ring and detachable water trap prevent spreading of peculiar smell.


• **便捷安裝的直插式卡套連接設計**
Insert type connection joint, convenient operation

• **抗腐蝕 全304不銹鋼材質**
Fully SUS 304 stainless steel, anti corrosion.

• **強化凹槽防滑設計**
Reinforced groove, non-slip design

• **易於清潔的地溝圓角設計**
Round edge channel design, easy for cleaning.

• **導流線水槽:** 使水充分流走無殘留水漬, 避免微生物污染的潛在危險且易於清潔。
Sloped water channel discharge drainage to avoids any potential microorganism contamination and makes cleaning easy.

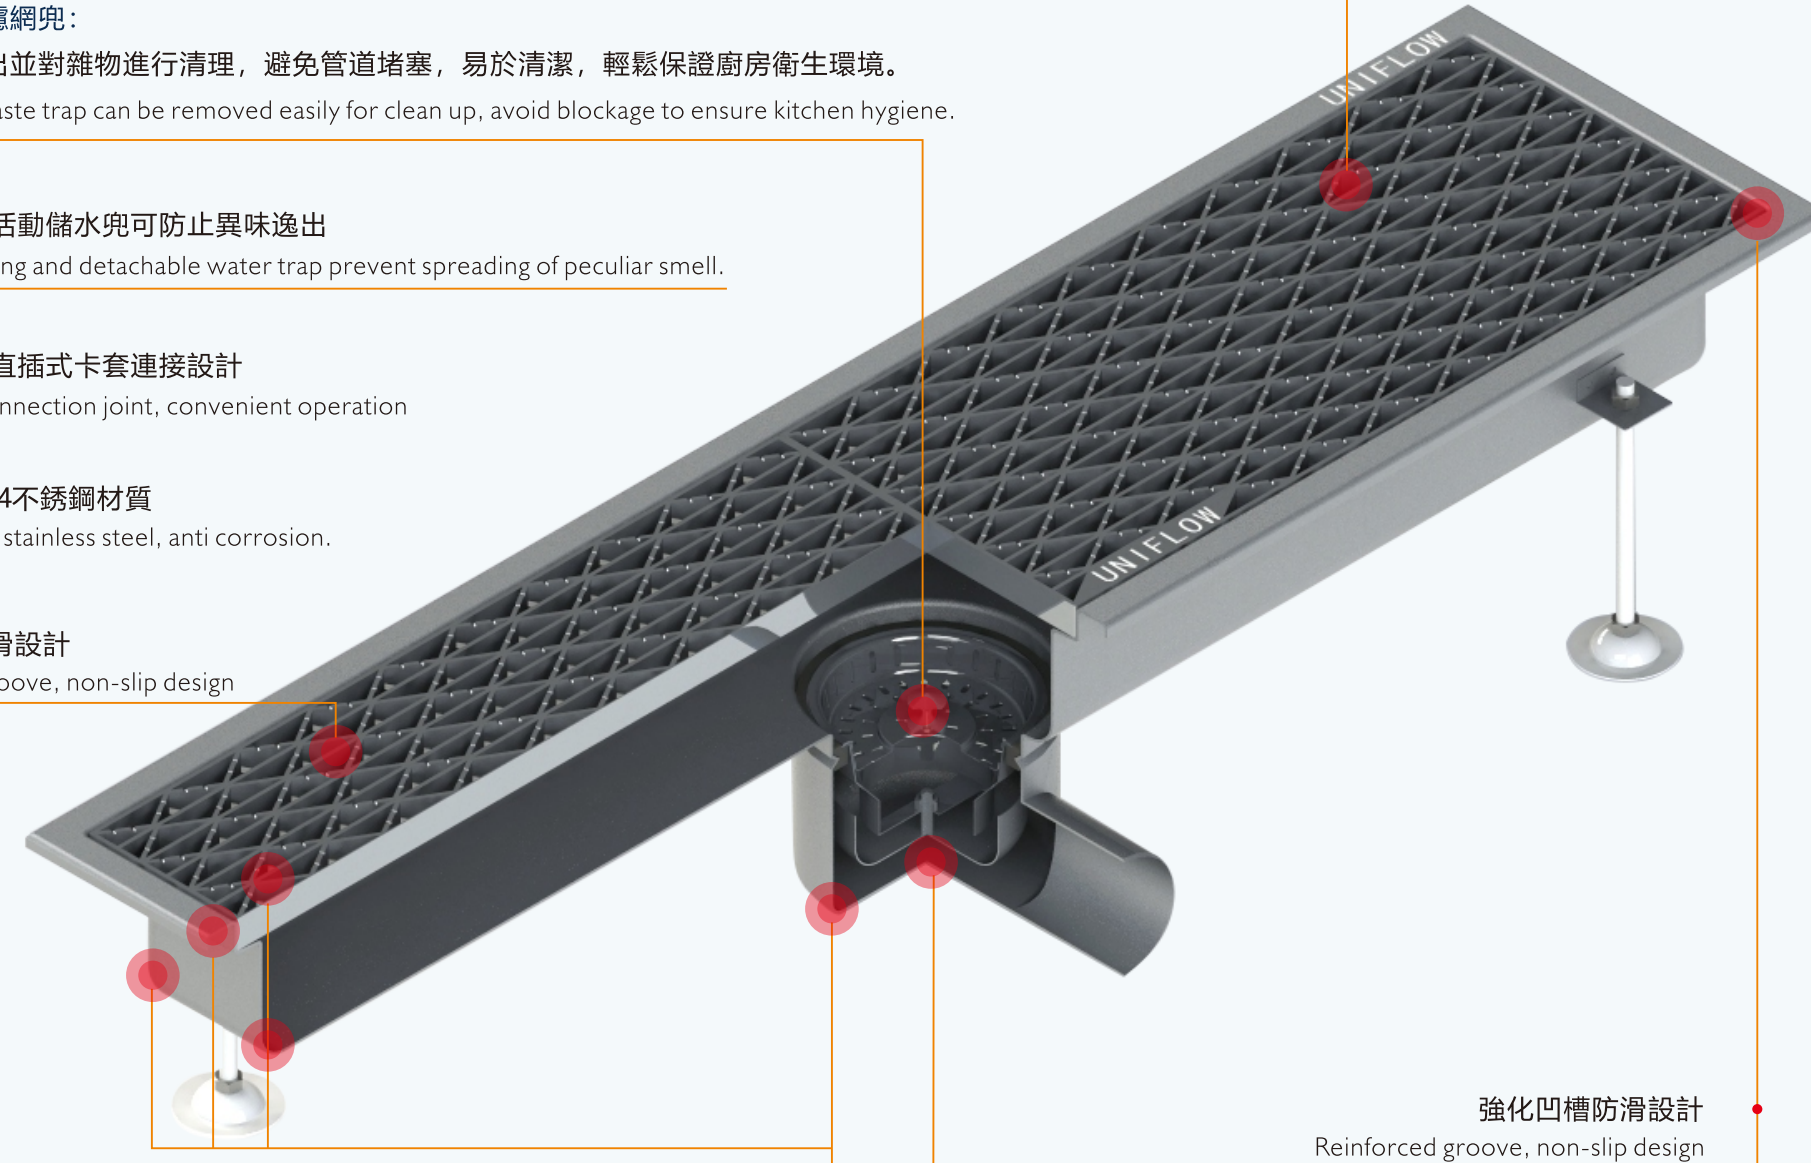

強化凹槽防滑設計
Reinforced groove, non-slip design

地溝與蓋板無縫對接, 不晃動,
防止污水濺出同時也避免地漏與結構結合處不滲水;
Seamless connection between channel and grating,
prevent sewage spill and avoid leakage from channel edge.




www.unibrand.asia

深圳市聯合商用廚房設備有限公司
SHENZHEN UNIBRAND KITCHEN EQUIPMENT LIMITED

深圳市龍崗區布吉街道 京南路華美工業區二棟
Building No. 2 Huamei Industrial Estate Jingnan Road,
Buji, Longgang District, Shen Zhen, China
T: 86-755-2857 2275 F: 86-755-2888 2756

所有解釋權歸UNIFLOW所有





一直以來，商業廚房排水系統對整體廚房設計非常重要。不合理的排水系統易造成廚房廢水蓄積，提高食品微生物污染的潛在危險機率。特別是在常處於高溫工作狀態的廚房環境中，細菌會迅速聚集並產生異味。惡性循環將會給食品安全與健康致命一擊。


Kitchen drainage system has always been an important design aspect for commercial kitchen. Unsuitable drainage system will cause accumulation of wastewater and increase risk of potential microbial contamination outbreak. Especially in kitchen's high operating temperature, bacterial builds up quickly and produce peculiar smell. The vicious result will be a fatal blow to the food and health safety.

UNIFLOW排水系統主要有5個系列：方形地漏，長方形明溝及渠，冷庫前明溝及渠，含隔氣漏渣網和各種定制尺寸明溝及渠。不同的環境使用不同系列排水系統以滿足不同的環境要求。

UNIFLOW drainage system are divided into 5 different series: square floor drain, box type drain channel, cold storage drain channel, odor trap and various custom drain application. Different areas use different drainage system to satisfy different requirements.

商業廚房主要分為四個區域：儲藏、準備區、生產區和洗滌處理區，UNIFLOW系列產品在設計上結合廚房環境，考慮每一個細節，不僅能最大程度的滿足衛生要求標準，結合實用性的同時也有助於節省人工清潔成本。


UNIFLOW drainage system designs according to different application of a kitchen: storage, preparation, cooking and washing. Drainage system design extends great attention to details to meet hygiene and cost criteria.

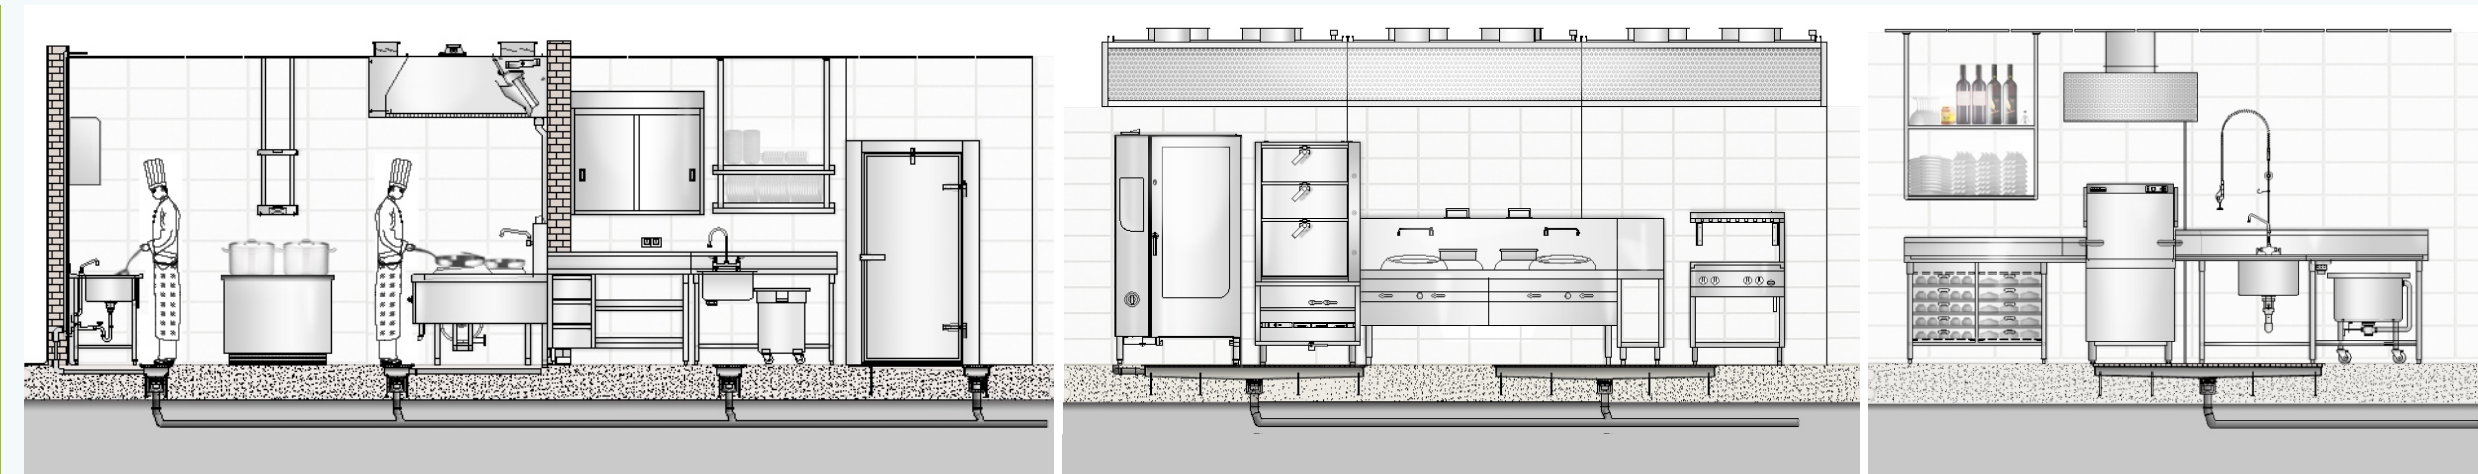

準備區 / PREPARATION AREA

烹飪區 / COOKING AREA

清潔區 / WASHING AREA

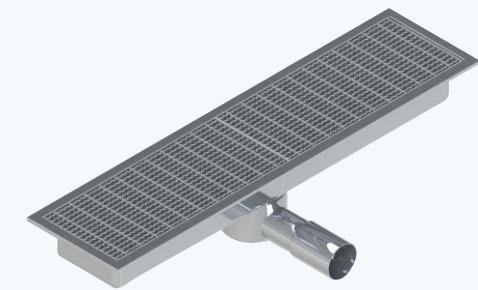

長方形明溝及渠
RECTANGULAR CHANNEL AND GRATING

長方形明溝及渠主要適用於排水量大的廚房區域，如烹飪操作間等，同時與適用於各種排水量較大場所。Rectangular channel and grating is mainly used in the places with abundant fluid water, such as cooking area, operation room.


型號 Model	UNI-CGL-OTS/D					
地溝蓋 Floor Grating	長度 Length	寬度 Width	高度 Height	方格 Grid	外圍板厚 Outer Thickness	內部板厚 Inner Thickness
	570	245	25	50*15	3.0	3.0
地溝 Floor Channel	板厚 / Thickness		長度 / Length		寬度 / Width	
	1.5		625		300	
可選項 Optional	隔渣籃 / Separation Basket		隔氣兜 / Odor Trap		下水管 / Drain Pipe	
	下水口外徑 Outlet Dia.	出水口外徑 Outlet Dia.	直管 Direct	彎管 Side		
	φ155		φ160		D	S



方形地漏
SQUARE FLOOR DRAIN

方形地漏適用於對衛生條件較高的場所。主要應用於儲藏室及備菜間等用水量較小的區域及各種排水量較小的場所區域。Square floor drain is usually used in places where requires high hygiene standard, such as storage room, preparation room with comparatively less water.

型號 Model	UNI-CGS/OT					
地溝蓋 Floor Grating	長度 Length	寬度 Width	高度 Height	方格 Grid	外圍板厚 Outer Thickness	內部板厚 Inner Thickness
	245	245	25	50*15	3.0	3.0
地溝 Floor Channel	板厚 / Thickness		長度 / Length		寬度 / Width	
	1.5		300		300	
可選項 Optional	隔渣籃 / Separation Basket		隔氣兜 / Odor Trap		下水管 / Drain Pipe	
	下水口外徑 Outlet Dia.	出水口外徑 Outlet Dia.	直管 Direct	彎管 Side		
	φ155		φ160		D	S

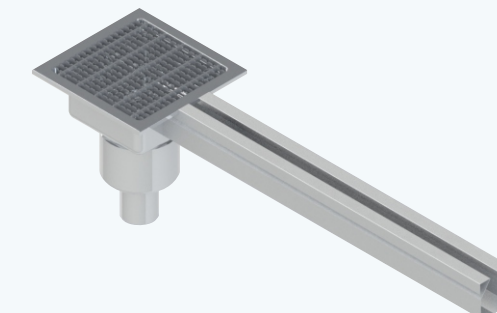

冷庫前明溝及渠
COLD STORAGE DRAIN CHANNEL

冷庫前明溝及渠應用於冷庫前排水。Cold storage drain channel are mainly used for discharging water for cold rooms.

型號 Model	UNI-CGC-OTS/D					
地溝蓋 Floor Grating	長度 Length	寬度 Width	高度 Height	方格 Grid	外圍板厚 Outer Thickness	內部板厚 Inner Thickness
	245	245	25	50*15	3.0	3.0
地溝 Floor Channel	板厚 / Thickness		長度 / Length		寬度 / Width	
	1.5		(1000+300)		300	
可選項 Optional	隔渣籃 / Separation Basket		隔氣兜 / Odor Trap		下水管 / Drain Pipe	
	下水口外徑 Outlet Dia.	出水口外徑 Outlet Dia.	直管 Direct	彎管 Side		
	φ155		φ160		D	S



高品質的排水系統是保證廚房衛生必不可少的設備。UNIFLOW由高耐蝕性全304不銹鋼材質製作而成，持久耐用。排水槽內橫坡和縱坡的特殊設計，使其易於清潔及維護。當推車或人經過特殊防滑蓋板設計時，污水不會四處濺出，從而保證廚房衛生安全。

High quality drainage system is an essential part of kitchen design. UNIFLOW is made of SUS 304 stainless steel with high anti-corrosion property to ensure durability. Easy maintenance design with parallel and crossed slopes channels out wastewater. Non-slip grating with beam-reinforced channels ensure wastewater doesn't splashes when working trolley or footsteps pass by.



食品安全 FOOD SAFETY

有效的排水系統能降低潛在微生物污染幾率。地溝與蓋板無縫對接，使得蓋板更平穩，當有員工經過時能防止污水濺出。

Efficient drainage system could reduce potential outbreak of bacteria contamination. The seamless joint between channel and supported grating make surface steady and flat without any splashes and spills when staff pass by.



成本控制 COST CONTROL

可拆卸地漏設計使產品更易清潔，節省人工成本，輕輕保證廚房衛生環境。高耐腐蝕304不銹鋼材質確保其耐用性。

Removable grease and odor trap lower expensive kitchen cleaning cost by saving labor. Full SUS 304 stainless steel with high anti-corrosion to ensure durability.



健康 & 安全 HEALTH & SAFETY

防滑格柵蓋板設計保障廚房工作安全。Anti slip grating could ensure a safer working environment.