



HOSHIZAKI

GOLDLINE SERIES



UPRIGHT SERIES

R Refrigerator temperature range: -6°C to $+12^{\circ}\text{C}$ **F** Freezer temperature range: -25°C to -7°C



Refrigerator (HRE) / Freezer (HFE)

Dual Temperature (HRFE)

MODEL	HRE-67B	HRE-77B	HRE-127B	HRE-147B	HRE-187B	HRFE-77B
	HFE-67B	HFE-77B	HFE-127B	HFE-147B	HFE-187B	
Storage Capacity	507L	599L	1109L	1311L	1720L	R: 260L
	507L	599L	1102L	1304L	1713L	F: 282L
Electric Consumption	317W	348W	501W	501W	501W	493W
	572W	572W	723W	723W	723W	
Dim.: W x D x (H + legs) mm	625 x 800 x (1900 + 100)	700 x 800 x (1900 + 100)	1200 x 800 x (1900 + 100)	1400 x 800 x (1900 + 100)	1800 x 800 x (1900 + 100)	700 x 800 x (1900 + 100)

COUNTER SERIES

R Refrigerator temperature range: -6°C to $+12^{\circ}\text{C}$ **F** Freezer temperature range: -25°C to -7°C



Refrigerator: D750mm (SDA) / D600mm (SNA)

MODEL	RTC-90SDA	RTC-120SDA	RTC-150SDA	RTC-180SDA
	RTC-90SNA	RTC-120SNA	RTC-150SNA	RTC-180SNA
Storage Capacity	190L	301L	413L	524L
	143L	228L	313L	398L
Electric Consumption	169W	193W	271W	314W
	169W	193W	271W	314W
Dim.: W x D x (H + legs) mm	900 x 750 x (700 + 100)	1200 x 750 x (700 + 100)	1500 x 750 x (700 + 100)	1800 x 750 x (700 + 100)
	900 x 600 x (700 + 100)	1200 x 600 x (700 + 100)	1500 x 600 x (700 + 100)	1800 x 600 x (700 + 100)

Freezer: D750mm (SDA) / D600mm (SNA)

MODEL	FTC-90SDA	FTC-120SDA	FTC-150SDA	FTC-180SDA
	FTC-90SNA	FTC-120SNA	FTC-150SNA	FTC-180SNA
Storage Capacity	190L	301L	413L	524L
	143L	228L	313L	398L
Electric Consumption	346W	408W	543W	582W
	346W	403W	473W	582W
Dim.: W x D x (H + legs) mm	900 x 750 x (700 + 100)	1200 x 750 x (700 + 100)	1500 x 750 x (700 + 100)	1800 x 750 x (700 + 100)
	900 x 600 x (700 + 100)	1200 x 600 x (700 + 100)	1500 x 600 x (700 + 100)	1800 x 600 x (700 + 100)

* 150mm adjustable leg / Castor are available

• AC Supply Voltage: Single Phase 220V 50 Hz • OPERATING CONDITIONS: Test Ambient Temperature 5°C to 43°C

GN SERIES

R Refrigerator temperature range: -6 °C to +12 °C

F Freezer temperature range: -25 °C to -7 °C

HRE-70B-GN
HFE-70B-GN

HRE-70B-GN-LD
HFE-70B-GN-LD

HRE-140B-GN
HFE-140B-GN

HRE-140B-GN-LD
HFE-140B-GN-LD



Upright Refrigerator (HRE) / Freezer (HFE)

* Accommodate 2/1 GN Pan

MODEL	HRE-70B-GN	HRE-70B-GN-LD	HRE-140B-GN	HRE-140B-GN-LD
	HFE-70B-GN	HFE-70B-GN-LD	HFE-140B-GN	HFE-140B-GN-LD
Storage Capacity	630L	630L	1370L	1380L
	630L	630L	1360L	1370L
Electric Consumption	443W	443W	501W	501W
	572W	572W	723W	723W
Dim.: W x D x (H + legs) mm	700 x 850 x (1900 + 100)	700 x 850 x (1900 + 100)	1400 x 850 x (1900 + 100)	1400 x 850 x (1900 + 100)

RTC-90SDA-GN
FTC-90SDA-GN

RTC-125SDA-GN
FTC-125SDA-GN

RTC-167SDA-GN
FTC-167SDA-GN



Counter Refrigerator (RTC) / Freezer (FTC)

* Accommodate 1/1 GN Pan

MODEL	RTC-90SDA-GN	RTC-125SDA-GN	RTC-167SDA-GN
	FTC-90SDA-GN	FTC-125SDA-GN	FTC-167SDA-GN
Storage Capacity	182L	301L	443L
	180L	301L	443L
Electric Consumption	229W	315W	398W
	404W	560W	560W
Dim.: W x D x (H + legs) mm	900 x 750 x (700 + 100)	1250 x 750 x (700 + 100)	1670 x 750 x (700 + 100)

RTC-90DDA-GN-2D
FTC-90DDA-GN-2D

RTC-90DDA-GN-3D
FTC-90DDA-GN-3D

RTC-125DDA-GN-4D
FTC-125DDA-GN-4D

RTC-125DDA-GN-6D
FTC-125DDA-GN-6D

RTC-167DDA-GN-6D
FTC-167DDA-GN-6D

RTC-167DDA-GN-9D
FTC-167DDA-GN-9D



Counter Drawer Refrigerator (RTC) / Freezer (FTC)

* Accommodate 1/1 GN Pan

MODEL	RTC-90DDA-GN-2D	RTC-90DDA-GN-3D	RTC-125DDA-GN-4D	RTC-125DDA-GN-6D	RTC-167DDA-GN-6D	RTC-167DDA-GN-9D
	FTC-90DDA-GN-2D	FTC-90DDA-GN-3D	FTC-125DDA-GN-4D	FTC-125DDA-GN-6D	FTC-167DDA-GN-6D	FTC-167DDA-GN-9D
Storage Capacity	176L	176L	296L	296L	443L	443L
	176L	176L	296L	296L	443L	443L
Electric Consumption	225W	225W	315W	315W	315W	315W
	395W	415W	560W	560W	619W	619W
Dim.: W x D x (H + legs) mm	900 x 750 x (700+100)	900 x 750 x (700+100)	1250 x 750 x (700+100)	1250 x 750 x (700+100)	1670 x 750 x (700+100)	1670 x 750 x (700+100)

* 150mm adjustable leg / Castor are available

• AC Supply Voltage: Single Phase 220V 50 Hz • OPERATING CONDITIONS: Test Ambient Temperature 5 °C to 43 °C

PILLARLESS (MULLIONLESS)

R Refrigerator temperature range: -6 °C to +12 °C

F Freezer temperature range: -25 °C to -7 °C



HRE-127B-ML
HFE-127B-ML



HRE-147B-ML
HFE-147B-ML



HRE-187B-ML
HFE-187B-ML

Upright Refrigerator (HRE) / Freezer (HFE)

MODEL	HRE-127B-ML	HRE-147B-ML	HRE-187B-ML
	HFE-127B-ML	HFE-147B-ML	HFE-187B-ML
Storage Capacity	1109L	1218L	1720L
	1102L	1205L	1713L
Electric Consumption	520W	539W	549W
	759W	835W	940W
Dim. : W x D x (H + legs) mm	1200 x 800 x (1900 + 100)	1400 x 800 x (1900 + 100)	1800 x 800 x (1900 + 100)



RTC-120SDA-ML
RTC-120SNA-ML
FTC-120SDA-ML
FTC-120SNA-ML



RTC-150SDA-ML
RTC-150SNA-ML
FTC-150SDA-ML
FTC-150SNA-ML




RTC-180SDA-ML
RTC-180SNA-ML
FTC-180SDA-ML
FTC-180SNA-ML

Counter Refrigerator & Freezer: D750mm (SDA) / D600mm (SNA)

MODEL	RTC-120SDA-ML	RTC-150SDA-ML	RTC-180SDA-ML	FTC-120SDA-ML	FTC-150SDA-ML	FTC-180SDA-ML
	RTC-120SNA-ML	RTC-150SNA-ML	RTC-180SNA-ML	FTC-120SNA-ML	FTC-150SNA-ML	FTC-180SNA-ML
Storage Capacity	301L	413L	524L	301L	413L	524L
	228L	313L	398L	228L	313L	398L
Electric Consumption	206W	279W	322W	411W	546W	585W
	206W	279W	322W	406W	476W	585W
Dim. : W x D x (H + legs) mm	1200 x 750 x (700+100)	1500 x 750 x (700+100)	1800 x 750 x (700+100)	1200 x 750 x (700+100)	1500 x 750 x (700+100)	1800 x 750 x (700+100)
	1200 x 600 x (700+100)	1500 x 600 x (700+100)	1800 x 600 x (700+100)	1200 x 600 x (700+100)	1500 x 600 x (700+100)	1800 x 600 x (700+100)

Model Number Identification

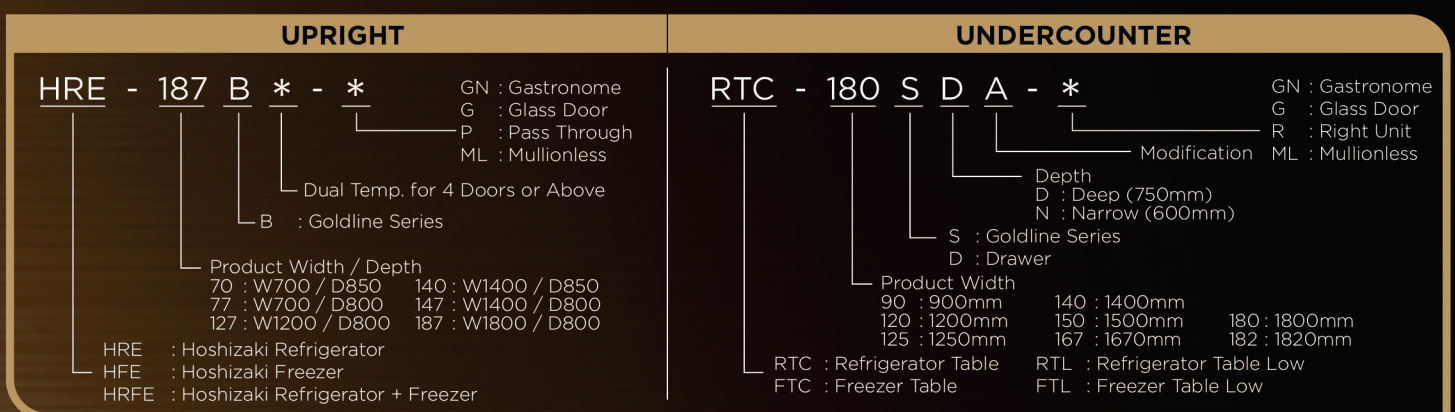

* 150mm adjustable leg / Castor are available

• **AC Supply Voltage:** Single Phase 220V 50 Hz • **OPERATING CONDITIONS:** Test Ambient Temperature 5 °C to 43 °C