移動式烹飪組合

MOBILE COOKING STATION









MOBILE REFRIGERATED CABINET

Model: KL-MRC

Size: 840(W)*915(D)*1540(H)mm

Total Power: 0.5KW

- Silent pulley, anti-collision apron around the bottom of the cabinet
- Built-in handles for easy movement
- Intelligent control system, electronic display screen
- Auto defrost system



2-ZONE INDUCTION HOB

Model: MK-OCTA-2B

Size: 400(W)x630(D)x220(H)mm Total power: 4.8KW

- German SCHOTT black glass-ceramic panel
- Automatic identification of material of cooking equipment With bridging function, two furnace plates work together
- and heat evenly Over 90% thermal efficiency



INDUCTION WOK

Model: MK-WOK

Size: 400(W)x630(D)x220(H)mm

Total Power: 3.5KW

- German SCHOTT black glass-ceramic panel
- Automatically identify if the pot material is available with timer shutdown function
- Safe shutdown in case of overheating and 2 hours of no working
- Over 90% thermal efficiency



Model: KL-MHC

Size: 840(W)*915(D)*1280(H)mm

- Silent pulley, anti-collision apron around the bottom of the cabinet
- Built-in handles for easy push
- Intelligent control system, electronic display screen
- Anti-overheating device



GRIDDLE

Model: MK-TPYK-2B

Size: 400(W)x630(D)x220(H)mm

Total Power: 6KW

- 3-speed low temperature thawing function, 52°C, 75°C and 92°C
- Timed shutdown function, safe shutdown in case of overheating and 2 hours of no working
- Over 90% thermal efficiency



TEPPANYAKI

Model: MK-TPYK-4B

Size: 700(W)x630(D)x220(H)mm

Total Power: 6.9KW

- 3-speed low temperature thawing function, 52°C, 75°C and 92°C
- Timed shutdown function, safe shutdown in case of overheating and 2 hours of no working
- Over 90% thermal efficiency



FRYER

Model: MK-FYR

Size: 400(W)*630(D)*220(H)mm

Total Power: 6KW One piece punching stretch forming

Auto temperature control

Over temperature protection, manual reset



PASTE COOKER

Model: MK-NDBR

Size: 400(W)x630(D)x220(H)mm

Total Power: 4.5KW

Water shortage protection device

Three gears of fire adjustment




www.uvtech.com.hk

Product specifications are subject to change without notice rights reserved. The content (including but not limited to text, photo and etc) belongs to UVTech.

be republished or used in any form.


Without written authorization from UVTech, such content shall not



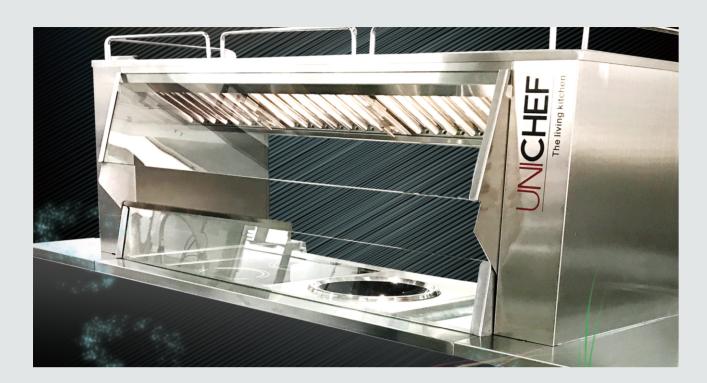


UNICHEF is a plug & play mobile cooking station. It is compact and flexible, it not only saves space but also makes a variety of cooking combinations as needed. At the same time, it offers a more convenient and environmental friendly way of emitting grease fumes. Compared to traditional kitchen ventilation, UNICHEF's unique exhaust system makes it more flexible and enjoyable on a practical basis.

HIGH-EFFICIENCY 5-STAGE FILTRATION SYSTEM:



- I、Front twister oil filter
- 2、HEPA Filter
- 3. Electrostatic processor module
- 4. Columnar activated carbon filter
- 5. Water mist cooling module

When cooking, its unique structure makes the smoke and fumes to be sucked into the filtration process, front twister oil and HEPA filtration process, thereby greatly eliminating grease and smoke particles of 10µm and above with efficiency up to 95%. Fine particles and fumes will be completely removed by high-voltage electrostatic processor and UV photolysis. The odor of the fumes will be absorbed and filtered by columnar activated carbon and water mist deodorization filter, and finally discharged with purified air. The unique 5-layer high-efficiency filtration and purification system makes it possible to remove and purify grease and smoke particles without any connection to an exhaust ductwork system.

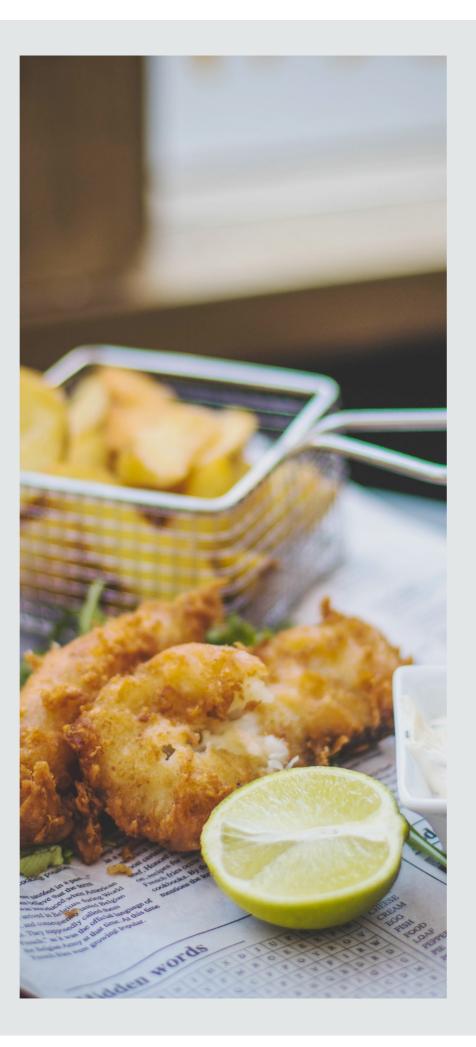

SPECIFICATION







MODEL	RRHS-2	RRHS-3	RRHS-4	
Basic configuration	High-efficiency filtration system Intelligent control system Flow rate design on demand Canopy style optional Multi storage cabinets optional			
Filtration system	Front twister oil filter HEPA Filter Electrostatic processor module Columnar activated carbon filter Water mist cooling module			
Table height	850mm			
Pulley	4 universal pulleys, 2 pulleys with brakes; Φ75mm, 200KG payload, bottom height 100mm			
Material	SUS304			
Qty. of cooking appliance	2	3	4	
Max. dim of cooking appliance (L*W*H):	400*630*220			
Dim (L*W*H)	1500*760*1400	1900*760*1400	2300*760*1400	
Table dim (L*W*H):	820*630*220	1220*600*200	1630*600*200	
Qty. of socket	2 × 220V/ 2 × 380V	3 × 220V/ 3 × 380V	4 x 220V/ 4 x 380V	
Power load	380 V, 50 Hz	380 V, 50 Hz	380 V, 50 Hz	
Power consumption	9 KW	12 kW	I 6 kW	
Extra socket	2 × 220V			
Lighting	Led spot light, 2W, 4000K			
Glass	Attachable tempered glass			
Guard bar	Guard bars on the front and two sides			
Material of bottom panel	Stainless steel			
Control panel	Status monitor and safety monito	Status monitor and safety monitor		
Storage space	On the top, working table and tw	On the top, working table and two sides of the cooking unit		